



Supermarket Freezer

Scancool - SIF700ADGC



Dimensions and weight

Product dimensions, HxWxD, mm	860 x 1895 x 830
Product depth w/handle, mm	830
Packaging dimensions, HxWxD, mm	895 x 1930 x 880
Gross volume, L	670
Net volume, L	501
Gross- / Net volume, L	670 / 501
Internal dimensions, HxWxD, mm	590 x 1700 x 655
Gross- / Net weight, kg	125 / 105

Performance and consumption

Energy efficiency class	C
Daily Energy Consumption, kWh/24	5,42
Annual energy cons. kWh/a	1980
Energy Efficiency Index (EEI)	34
Refrigeration / freezing technique	Static
Climate class	4
Temperature class	L1
Type of refrigerant / gas gr.	R290a / 135
Temperature range °C	-15 / -24

Installation and power

Voltage / hertz, V/hz	220-240V / 50hz
No. of electrical phases	1L+N
Watt / Ampere, W/A	300 / 2.5
Peak power watt, W	750
Length of Powercord, cm	200

Design and comfort

Controller	Digital
Control panel	Outside
Digital display	Yes
Internal light	Horizontal LED
External thermometer	Yes
Door- / lid type	Sliding
Handle	Outside
Number of castors, pcs	4 casters (2 w/brake)
Lock & Key	No

Colour and material

Outside colour	Dark Grey
Inside Colour	White
Colour and material of door/lid	Sliding glass

Features

Basket Size (HxWxD) (mm)	No
--------------------------	----



Item number	23424410000SIF700ADGC	Taric goods code	8418501190
EAN code	5704704021464	QTY in 40HQ	39

Short Description

Temperature range for freezing function from -15 to -24°C
Temperature range for cooling function from +2 to +7°C

The freezer also comes with easy backward and forward sliding lids and is therefore suitable for self-service.


The box has horizontal LED lighting along the entire inside of the front which provides a good overview.

Use model SIF600ADGC if you need an end model for island solution.

Key features

- Back and forward sliding lids for convenience
- Auto Defrost and Dual function, freezer can be converted to cooling 2-7°C
- Dividers and coated white steel inner liner
- Bright LED interior lighting along the entire inside of the front.
- 4 strong castors, 2 with brake (not mounted)
- Protective bumper bars for durability
- Digital thermometer
- Use model SIF600ADGC if end model needed for island solution

Measurement drawing

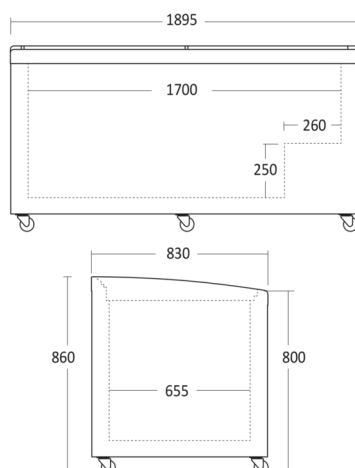

SCANCOOL

www.scandomestic.dk